


## 2" Express Cordless Fauxwood Blinds

- 2" Express Cordless Fauxwood Blinds create a natural look that's attractive and extremely durable
- Decorative Royal Crown Valance with mitered cut,  $\frac{3}{4}$ " Returns for a clean, attractive look
- 2" Express Cordless Fauxwood Blinds are available in White or Pearl. All parts and components are color coordinated
- Standard operation is Wand Tilt on the left. Wand Tilt is only available

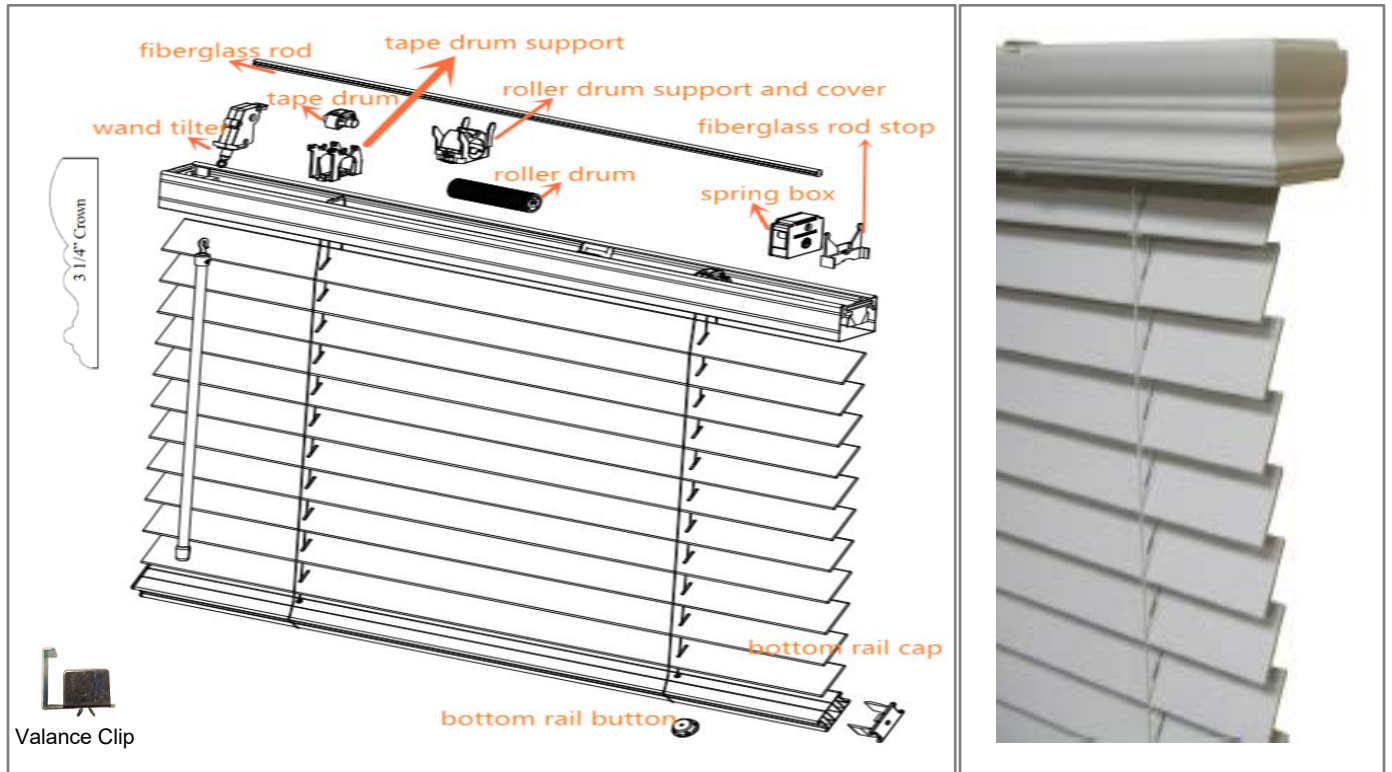

1. Valance is 3 1/4" Fauxwood Royal Crown Valance. Color Coordinated with PVC – passes 500 Hour UV rated & NFPA 701 Fire Retardant test.
2. Slats are color coordinated 2" PVC, 2.0"x2.28mm thick – passes 500 Hour UV rated & NFPA 701 Fire Retardant test.
3. Bottomrail is 2" Fauxwood square. Color coordinated PVC 500mm width x 15mm height - passes 500 Hour UV rated & NFPA 701 Fire Retardant test.
4. Headrail is heavy duty high profile steel, 2" height x 2 1/4" width with U shaped rolled edges treated with iron phosphate to resist corrosion.
5. Tilt Rod is color coordinated pvc and 1/4" across at its points.
6. Bottomrail buttons attach the cords and ladders to the bottomrail for a clean finished appearance.
7. Ladders are color coordinated braided polyester ladders, 54mm cable x 44mm rung spacing for level slats.
8. Top Slat Clip is clear plastic attached to the top slat to guide slats for a tighter closure.
9. Tape Drum Support is constructed of engineered grade plastic to ensure a smooth rotation of tilt rod – stainless steel roller pins for smooth lifting.
10. Tape Drums are heavy duty for securely attached braided ladders – Poly Acetac Resin (POM).
11. Warning Tags and Warning Labels are compliant with 2018 ANSI Child Safety Standard A100.1-2018
12. Valance clips are STEEL wrap around for secure valance placement. Steel valance slips will not deteriorate from intense UV exposure
13. Center Supports are heavy duty metal center supports for even headrail support – brackets provided for all blinds over 60" wide.
14. Installation Brackets are color coordinated heavy duty metal that are phosphate treated steel with a polyester primer and polyester/baked enamel finish coat.
15. End Stiffeners snap in the headrail end for tight alignment.

## Warranty, Care and Cleaning of your 2" Cordless Fauxwood Blinds

The cordless system offers equal weight distribution throughout the blind. This allows optimal lift capacity up to a 96" wide. The bottom-rail is molded with the user to grip while lifting or lowering the blind.

Regular cleaning with feather duster or soft, clean cloth is suggested. Blinds can also be cleaned using a hand-held vacuum with a brush attachment on low suction, or with a mild soap and water. Professional ultrasonic cleaning can be utilized.

Do not use cleaning methods including heat, abrasives or solvents. Use of these products will void the warranty.

Signature Window Coverings 2" Cordless Fauxwood blinds are covered by a one year manufacturer's Warranty. Products are warranted against original defects in materials or workmanship during this one year period.

Conditions or damage caused by abuse, accidents, alternations misuse or failure to follow instructions for installation, and care and cleaning will not be covered.

Normal wear and tear, including but not limited to fading or yellowing over the lifetime of the product is considered normal. Deterioration when exposed to sunlight for extended periods of time, and cord failure as a result of wearing out over time are also not covered under the warranty.

## Blind Dimensions & Limitations

<b>Blinds</b>	
Minimum Width	10"
Maximum Width	96"
Minimum Height	14"
Maximum Height	84"
Inside Mount	1/2" deduction from width only
Outside Mount	No deduction or addition
<b>Valances</b>	
Inside Mount w/o Returns	1/8" deduction
Inside Mount with Returns	2" addition to the width ordered
Outside Mount	1" addition to the width ordered
Valances over 8 feet	Will be spliced
<b>Returns</b>	
Inside Mount	3/4" length
Outside Mount	3" length
Outside Mount with Spacers	3 1/2" length

